



flotek.g

Global Conference & Exhibition – 2017  
“Innovative Solutions in Flow Measurement and Control -  
Oil, Water and Gas”



28-30 August 2017  
FLUID CONTROL RESEARCH INSTITUTE

### PAPER SUBMISSION INSTRUCTIONS FOR AUTHORS

- Submission of papers:** Authors are requested to submit their papers electronically by using online submission at [www.flotekg.com](http://www.flotekg.com). Authors and organizers will communicate by email/website. When online submission is not possible, authors may send two draft copies of the manuscript, including electronic file, accompanied by a covering letter. MS Word, 2000 or higher version shall be used.
- Review:** All papers will be reviewed by experts of Paper Review Committee.
- Submission Language:** English
- Types of contribution:** Original research papers, reviews etc. in related themes.
- The title** shall be brief, specific and amenable to indexing.
- Author's** names should not have academic titles and followed by initial of surname. Authors of correspondence shall be denoted with superscript asterisk.
- Keywords:** Five to Six keywords should be chosen carefully
- Correspondence:** Please indicate the author responsible for correspondence.
- Telephone and fax numbers:** should be given in addition to the E-mail address and the complete postal address for all authors.
- Electronic Annexes:** Authors can submit annexes, such as short videos, computer enhanced images, audio clips and large databases in CD ROMs.
- Notification:** Authors will be notified for the acceptance of their paper.
- Final Accepted Paper on Disk:** Once the paper is accepted, an electronic version of the paper should be submitted together with the matching hardcopy.
- Special Keynote/Invited Lectures, covering status of R&D** and future perspectives in the area shall be divided into Title, authors, addresses, abstract, keywords, main text (with appropriate sub- headings), conclusions, future perspectives / scope, acknowledgements and references,
- Research papers** shall be divided into Title, authors, affiliation, addresses, abstract, keywords, main text, introduction, material & methods, results, discussion, conclusion, acknowledgments, appendices and references.
- Manuscripts** shall be typed in two column, single-spaced on one side of A4 size paper with 1" margin on all sides, fully justified. The page should be numbered consecutively, starting with the title page in italics Arial 10 pt at bottom centre. Length of the paper should be with in 10 – 14 pages including figures, tables and references with 6-8 pages being paper text.
- Fonts:** Paper title Arial 14 pt, main body of the text Arial 11 pt, main headings Arial 12 pt Bold Capitals, sub headings Bold, Sentence Case and bullet points black circular.
- Abstract,** shall have 200-300 words and convey the aim, scope and conclusion of the paper, outline the results and explain the significance of the results.

18. **Table and figures** shall be referred to in numerical order and set using table format only and given suitable caption at top. Table shall not duplicate results presented elsewhere. Footnotes to tables should be typed below the table and should be referred by superscript lowercase letters. Table number shall be written as **Table1-Tittle**. Title of figures should appear at the bottom of the figure. Figure number shall be written as **Figure 1-Tittle. Figures can be referred as Fig.1**
19. **Symbols and abbreviations** shall be defined and used only when absolutely necessary. Superscripts and subscripts and ambiguous characters shall be clearly indicated. Particular care should be exercised in identifying all symbols and in avoiding ambiguities. Equation numbers should appear in parenthesis and numbered consecutively. All equation numbers must appear on the right-hand side of the equation and should be referred within the text. Use the following sequence of parenthesis :)).
20. **Units:** Follow SI system of units. For other quantities, give their equivalent in SI.
21. **Photographs** must be with high contrast and clearly referred.
22. **Acknowledgements:** Please furnish in a separate section at the end of the paper.
23. **Copyright:** Submission of paper implies that the authors permit the organizers to include paper in the published proceedings. The copyright transfer also covers the exclusive rights to reproduce and distribute the article, including reprints, photographic reproductions, and any other reproductions of similar nature.
24. **Logos:** For professional proceedings, company logos need not to be included
25. **References:** All publications cited in the text should be presented in list of references in square brackets (e.g. [1]) in a numerical list at the end of the paper.

**For Example:**

[1]. Green, S.L., 1995

26. **Bio-Data:** Authors should submit their carrier biography for introducing before presentation.

**Please submit the paper through the website.**

URL: [www.flotekg.com](http://www.flotekg.com)

**Presenting author Biodata**

**Name** : xxxxxxxxx  
**Designation** : xxxxxxxxxxx  
**Company** : xxxxxxxxxxxxx  
**E-mail**: xxxxx  
**Phone** : xxxxx  
**Fax** : xxxxx  
**Qualifications** : xxxxxx

**Area of Expertise**

---

---

---

---

---

---

**Significant achievements**

---

---

---

---

---

---

**Professional Memberships**

---

---

---

---

---

---

**Papers Published in Journals and Conferences**

---

---

---

---

---

---

## Numerical prediction and experimental verification of cavitation of Globe type Control Valves

S. Rammohan\*  
Fluid Control Research Institute,  
Palakkad, INDIA  
Email

S. Saseendran  
Fluid Control Research Institute,  
Palakkad, INDIA  
Email

### ABSTRACT

Globe valves are one of the oldest types of valve used for throttling applications for all sizes due to better controllability and wider range. One of the major limitations associated with the use globe valves in liquid application is cavitation and it takes place both in part open and in fully open conditions due to varied reasons. There are different designs of globe valves available but for control valve applications, cage and plug designs are widely employed. Cage and plug design consists of body, valve cage, plug and an actuating mechanism. Actuating mechanism is connected to the valve plug which is a moving part, through valve shaft. There are many investigations reported about the flow visualization and numerical simulation of normal type globe valves. But study on valves with cage and plug design are not reported in detail. The objective of the present study is to provide a three dimensional analysis of flow.

### KEY WORDS

Cavitation, globe valve, numerical simulation, experimental validation

### 1.0 INTRODUCTION

Valves are widely used in irrigation, energy, water distribution networks and process industries and in many other areas. Among the different types of valves used in the process industry, control valves play a vital role in the functioning and profitability of the plant. Trouble-free operation of control valves in the piping network is essential to avoid a situation leading to the total closure of the concerned industrial activity. Further, their efficient working leads to an effective use of the available resources. The abundant improvements in the design and performance

of control valves are still insufficient to claim perfection in the agreement of theory and practice. The phenomenon of cavitation in control valves is the one in which some more progress can be achieved.

Globe valves are widely used for throttling applications in the process industry for both liquid and gaseous applications. The main advantages are relatively low cost, linear characteristics and good controllability and wider range. To obtain the required flow and pressure drop characteristics for the valves, different types of internals have been evolved for globe type valves. Cage and plug internal is one among them. One of the major limitations associated with the use of globe valves in liquid application is cavitation. This limits the operating regime of valves. To combat cavitation in valves, valve manufactures have evolved different solutions including design improvement, use of harder materials to reduce erosion rate, limiting the valve operation to some critical values so that downstream pressure never goes below vapour pressure etc.

### 2.0 NUMERICAL SIMULATION

Multi phase cavitation enabled mixture, RNG k-epsilon model was employed for analysis. The flow was governed by continuity and momentum equations with turbulence and multiphase (cavitation) modeling. Flow, volume fraction and turbulence equations were solved for the study. Following assumptions are made in the cavitation model:

- The system under investigation involves only two phases (a liquid and its vapor), and a certain fraction of separately modeled non-condensable gases.

- Both bubble formation (evaporation) and collapse (condensation) are taken into account in the model.
- The mass fraction of non-condensable gases is known in advance.

The summary details of the boundary conditions and the solver details of simulation employed for the solution of the present problem is shown in Table 1. The working fluid is assumed to be a mixture of liquid, vapor and non-condensable gases. Standard governing equations in the mixture model and the mixture turbulence model describe the flow and account for the effects of turbulence.

A vapor transport equation governs the vapor mass fraction,  $f$ , given by:

$$\frac{\partial}{\partial t}(\rho f) + \nabla \cdot (\rho \vec{v}_v f) = \nabla \cdot (\gamma \nabla f) + R_e - R_c \quad - \quad (1)$$

where  $\rho$  is the mixture density,  $\vec{v}_v$  is the velocity vector of the vapor phase,  $\gamma$  is the effective exchange coefficient, and  $R_e$  and  $R_c$  are the vapor generation and condensation rate terms (or phase change rates). The rate expressions are derived from the Rayleigh-Plesset equations, and limiting bubble size considerations (interface surface area per unit volume of vapor). When liquid enters the region of higher pressure implosion of bubble takes place and the rate of condensation,  $R_c$ , is given by,

$$p > p_{sat} \quad R_c = C_c \frac{V_{ch}}{\sigma} \rho_l \rho_v \sqrt{\frac{2(p - p_{sat})}{3\rho_l}} f \quad - \quad (3)$$

## 2.1 Details of valve tested

The type of valve used for the study was a normal 75 mm nominal bore (NB) Globe type control valve with cage and plug design. These types of valves are prone for cavitation in the liquid applications. Figure 1 shows a valve cage with 4 holes drilled with combination plug. The diameter of the holes drilled were 17.5 mm with an effective total flow area of 981.11 mm<sup>2</sup>. For the numerical studies, the valve was connected to pipe at both ends as shown in Figure 2.

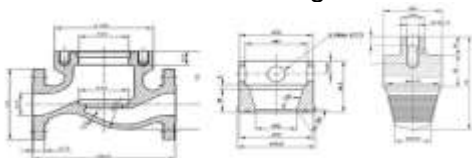


Figure1-Details of valve body, cage and plug.

The diameter of the pipe and the thickness of the valve were same for the model and the one used for experimentation. Upstream and downstream lengths considered for the experimental set up were 750 and 1500 mm corresponding to 10 and 20 diameters of the pipe. This was selected so that the flow is fully developed at the valve inlet and full pressure recovery takes place in the pipe after the valve. Five different configurations of the valve internals were employed during simulation. Table 2 shows the details of orifices provided in the cage of the valve for simulation and experimental purpose. In all the configurations, the flow area and height of the openings were kept constant. During analysis, valve was kept in full open condition.

Table 1- Details of orifices in cage.

Total area = 981.1 mm <sup>2</sup> Height of hole (h) = 17.5 mm		
Sl. No.	No. of orifices	Diameter of orifice(d)
1	4	17.50
2	6	10.50
3	8	7.60
4	12	4.87


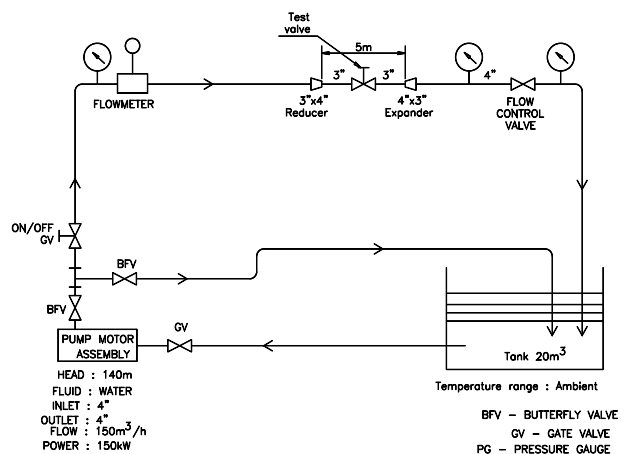



Figure 2 Schematic of experimental set

## 3.0 up

on a 75 mm NB globe valve with cage plug

details described in Table 2 to validate the simulation results. The schematic of the experimental test setup is shown in Fig.3. The test setup was designed as per Tullis [11, 12]. It is an open loop re-circulating system which includes an underground sump that holds about 300 cubic meters of water, a 150 kW, multi stage centrifugal pump and valves to control and bypass the flow.

#### 4.0 RESULTS

During simulation, flow rate through the valve, turbulent kinetic energy, vapour fraction (ratio of vapour phase in the mixture), mixture density and velocity of vapour were analysed. These were performed for varying differential pressure across the valve and different valve internal configurations.

#### 5.0 CONCLUSION

A 75 mm NB valve was analysed for flow capacity and cavitation performance using numerical simulation with CFD<sub>4</sub> package *FLUENT*. Five different cage configurations were tried to study the effect of prediction accuracy on valve configuration. Sufficient upstream and downstream lengths of pipe were provided for fully developed flow. Simulation was performed for varying differential pressure across the valve. The flow rate, turbulent kinetic energy, vapour fraction of vapour phase and mixture density were monitored during simulation.

#### ACKNOWLEDGMENTS

Authors extend their gratitude to Mrs. S.K. Sreekala, Senior Research Engineer and Mr.

S. Manikandan, Research Engineer, Fluid Control Research Institute, for their support provided during experimentation and simulation of the valve.

#### NOMENCLATURE

$C_c$	Empirical constant (Condensation)
-	-
$C_e$	Empirical constant (Vapourisation)
-	-
$C_v$	Valve capacity factor
$(Q/DP^{0.5})$	-
D	Pipe diameter
	(mm)
d	Width of hole
	(mm)

#### REFERENCES

- [1] Brennen, C.E. 1995, *Cavitation & bubble dynamics*, Oxford University Press.
- [2] Wang, Y.C. and Brennen, C.E. 1998, "One-dimensional cavitation flow through a converging diverging nozzle", *Trans. ASME J. of Fluids Engineering.*, 120, 166-170.
- [3] Takehashi, K., Matsuna, H. and Miyamoto, H. 2001, "Cavitation characteristics of restriction orifices", Proc. of 4<sup>th</sup> international symposium on cavitation, CAV 2001.
- [4] Ishimoto, J. and Kamiyama, S. 2005, "Numerical study of cavitating flow of magnetic fluid in a vertical converging-diverging nozzle", *J. of Magnetism and Magnetic Materials*, 289, 260-263.